


Product Data Sheet

Application: HVAC

CLIMPIPE SECTION ALU2

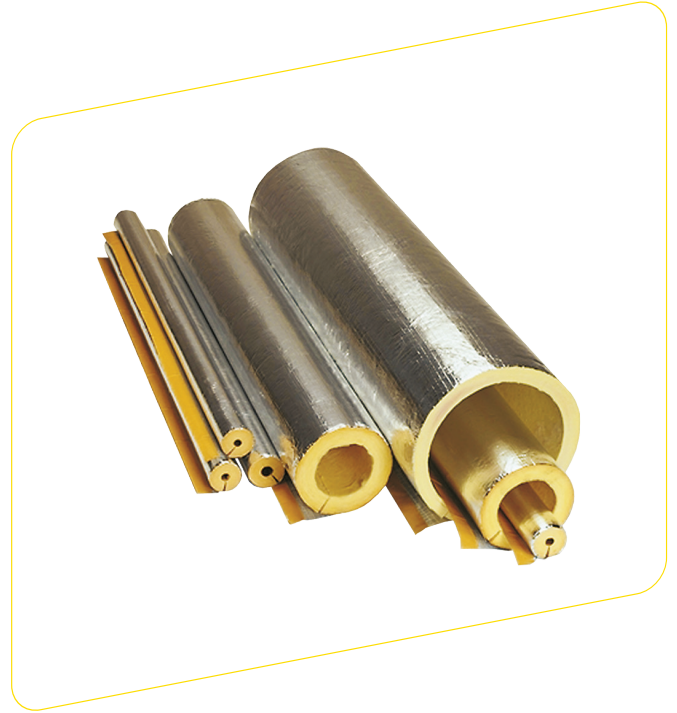

HVAC - Thermal Insulation for Pipework

CLIMPIPE Sections can be considered for the thermal and acoustic insulation of pipework. Robust and lightweight, they feature pre-formed 'snap on' sections with a reinforced self-adhesive overlap to help ensure a strong vapour barrier. Manufactured in 1.2m lengths, they offer the opportunity for fewer joints than traditional 1m products, helping to reduce thermal bridging.

Features and Benefits



Thermal Performance

The uniform density and concentric positioning of the bore hole offers energy savings by effectively controlling the thermal heat loss and gain along the length of the pipework.



Acoustic Performance

Due to the natural sound wave damping effect that glass mineral wool possesses, noise levels from waste water pipes services can be reduced with CLIMPIPE Sections.



Easy to Install

The 1.2m pipe sections are lightweight and easy to install with pre-formed snap on sections and a self-adhesive overlap for fast and efficient installation.



Recycled Glass

Manufactured from up to 70% recycled glass.



Fire Classification

Achieves a Euroclass A2_L-s1,d0 Reaction to Fire classification, according to EN 13501-1.

Key Considerations

When using ISOVER CLIMPIPE Section Alu2 you need to satisfy yourself that use of the product meets all relevant national Building Regulations and guidance as well as local, national and other applicable standards relevant for your construction or application, including requirements in relation to fire.

Please refer to the following product documents:

- Declaration of Performance - available at insulation-uk.com/products/isover-climpipe-section-alu2
- Safe Use Instruction Sheet - available at insulation-uk.com/healthandsafety

Product Specification

| Nominal Insulation Thickness (mm) | Inner diameter (mm) | | | | | | | | | | | | | | | | | |
|-----------------------------------|---------------------|----|----|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|
| | 15 | 22 | 28 | 35 | 42 | 48 | 54 | 60 | 70 | 76 | 83 | 89 | 108 | 114 | 140 | 168 | 219 | 273 |
| 20 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | | | | | | | | |
| 25 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 30 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 40 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 50 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ |
| 60 | | | | | | | | ✓ | | ✓ | | ✓ | | ✓ | | ✓ | ✓ | ✓ |

Thermal Conductivity

| | | | | | | |
|---------------------------------------|-------|-------|-------|-------|-------|-------|
| Mean temp °C | 10 | 50 | 100 | 200 | 300 | 400 |
| Declared thermal conductivity (W/m.K) | 0.033 | 0.036 | 0.043 | 0.062 | 0.092 | 0.130 |

Characteristics

| | | | |
|----------------------------|--|---|--|
| Fire | Euroclass A2 _s -s1,d0 Reaction to Fire classification according to EN 13501-1. | Certification | UKCA Marked to EN 14303. CE marked to EN 14303. Designation codes (where D _o is the outside diameter): D _o ≤ 150mm MW-EN 14303-T8-ST(+)-500-MV2 D _o ≥ 150mm MW-EN 14303-T9-ST(+)-500-MV2 |
| Service Temperature | Can be considered for continuous service temperatures from 5°C to 500°C. The temperature on the aluminium facing should not exceed 80°C. When using the product for the insulation of pipework with a surface temperature below dew point, care must be taken to ensure a 100% vapour barrier is maintained. | Handling, Storage, Health and Safety | Information regarding storage, installation and handling of ISOVER products and health and safety information can be found at insulation-uk.com/healthandsafety . EUCEB certified, demonstrating our mineral wool fibre products conform with Note Q of Regulation (EC) No 1272/2008. |
| Corrosiveness | Can be considered to fulfill the demands in ASTM C795-08 (Standard Specification for Thermal Insulation for Use in Contact with Austenitic Stainless Steel) section 13. | Quality | All ISOVER products are manufactured under Quality Management Standard – ISO 9001. |
| Environmental | All ISOVER products are manufactured under Environmental Management System – ISO 14001. | External Application | Can be considered for external applications when used with an appropriate weatherproof jacketing system. |
| Recycled Content | Manufactured from up to 70% recycled glass. | | |



ISOVER

White House Industrial Estate,
Runcorn, Cheshire, WA7 3DP

**Customer Service -
Order Placement and Enquiries**

Tel: 01473 820820

Email: iukcustomerservice@saint-gobain.com

Technical Support Team

Email: isover.technical@saint-gobain.com

insulation-uk.com

Published date: 29 Feb 2024

ISOVER reserves the right to amend or revise product specification without notice. The information in this publication is correct at the time of publication. The information herein should not be read in isolation as it is meant only as guidance for the user, who should always ensure that they are fully conversant with the products and systems being used and their subsequent installation prior to the commencement of work.

For an up-to-date library of product information, users should visit the website at insulation-uk.com

Saint-Gobain ISOVER UK Registered in England. Company Number 10442670.

Registered Offices: Saint-Gobain House, East Leake, Loughborough, Leicestershire, LE12 6JU.