


Product Data Sheet
Application: External Walls

ISOVER STEEL FRAME INFILL BATT

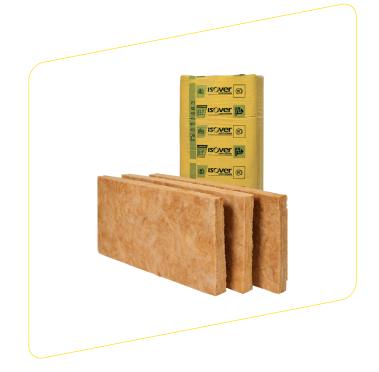

Thermal insulation for lightweight steel frame walls

Isover Steel Frame Infill Batt is a non-combustible glass mineral wool insulation supplied in 600 x 1200mm batts. It can be easily friction fitted within the stud framework of lightweight steel frame external walls, ensuring straightforward installation and helping to minimise gaps and maximise thermal performance.

Features and Benefits



Thermal Performance

Thermal conductivity of 0.036 W/m.K. Helps to reduce heat loss within the building envelope and as a result decreases energy costs.



Acoustic Benefits

The fibre structure of the glass mineral wool traps sound energy, helping to improve the acoustic comfort of those living or working within the building.



Ease of Install

Supplied in 600mm widths to fit between standard steel framework centres. Friction-fits within the stud with no slumping or additional fixings required.



Fire Classification

Achieves a Euroclass A1 Reaction to Fire classification, according to EN 13501-1.



Sustainability

Manufactured from up to 82% recycled glass with all electric equipment in the plant powered by 100% renewable electricity. For further details visit isover. co.uk/CSR

Key Considerations

When using Isover Steel Frame Infill Batt, you need to satisfy yourself that use of the product meets all relevant national Building Regulations and guidance as well as local, national and other applicable standards relevant for your construction or application, including requirements in relation to fire and applicable height restrictions.

Please refer to the following product documents which are available at isover.co.uk/products/isover-steel-frame-infill-batt (product properties) and isover.co.uk/healthandsafety (safety properties):

- Declaration of Performance
- Safe Use Instruction Sheet

Product Specification

| Product code | Thickness (mm) | Length (mm) | Width (mm) | Batts per pack | Pack area (m²) | Packs per pallet | Pallet area (m²) | λD Declared thermal conductivity (W/m.K) | RD Declared thermal resistance (m².K/W) |
|--------------|-------------------|-------------|------------|-------------------|-------------------|---------------------|---------------------|---|--|
| 5200625382 | 50 | 1200 | 600 | 16 | 11.52 | 20 | 230.40 | 0.036 | 1.35 |
| 5200625384 | 75 | 1200 | 600 | 10 | 7.20 | 20 | 144.00 | 0.036 | 2.05 |
| 5200625386 | 100 | 1200 | 600 | 8 | 5.76 | 20 | 115.20 | 0.036 | 2.75 |

Characteristics

| Thermal | Declared thermal conductivity of 0.036 W/m.K under EN 13162: Thermal insulation products for buildings. Factory made mineral wool (MW) products. | Handling, Storage, Health and Safety | Information regarding storage, installation and handling of Isover products and health & safety information can be found at isover.co.uk/healthandsafety. | | |
|-------------------------|--|--|--|--|--|
| Fire | Euroclass A1 Reaction to Fire classification according to EN 13501-1. | | Achieves a Eurofins Gold product status for indoor air quality (certificate available at isover.co.uk/Eurofins). EUCEB certified, demonstrating our mineral wool fibre products conform with Note Q of Regulation (EC) No 1272/2008 (to download the certification, please visit isover.co.uk/accreditations.) | | |
| Environmental | All Isover products are manufactured under Environmental Management System - ISO 14001:2015. | | | | |
| Recycled Content | Manufactured from up to 82% recycled glass. | | All Isover products are manufactured under Quality Management Standard - ISO 9001. | | |
| Certification | UKCA Marked to BS EN 13162. CE marked to EN 13162. Designation code: MW-EN 13162-T4. | Quality | | | |



Isover

Saint-Gobain Isover UK Limited, Saint-Gobain House, East Leake, Loughborough, Leicestershire, LE12 6JU.

Customer Service -Order Placement and Enquiries

Tel: 0800 0322 555 Email: isover.customerservice@saint-gobain.com

Technical Support Team

Email: isover.technical@saint-gobain.com

isover.co.uk

Published date: 25 November 2024

Isover reserves the right to amend or revise product specification without notice. The information in this publication is correct at the time of publication. The information herein should not be read in isolation as it is meant only as guidance for the user, who should always ensure that they are fully conversant with the products and systems being used and their subsequent installation prior to the commencement of work.

For an up-to-date library of product information, users should visit the website at isover.co.uk $\,$

Saint-Gobain Isover UK Registered in England. Company Number 10442670.

 $Registered\ Offices: Saint-Gobain\ House, East\ Leake,\ Loughborough,\ Leicestershire,\ LE12\ 6JU.$