


Product Data Sheet

U PROTECT WIRED MAT 4.0 ALU1

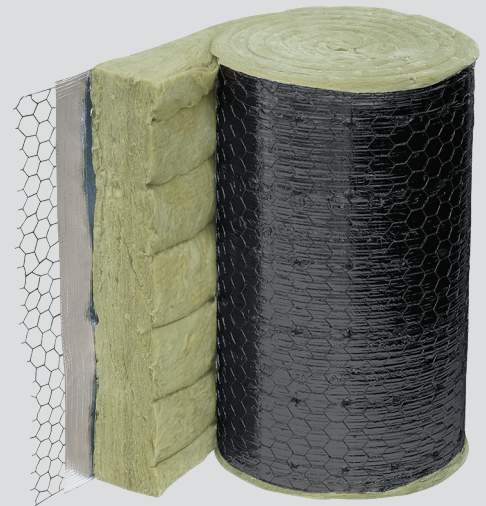

High Performance

ULTIMATE™ Wired Mat for Fire Protection of Circular Ductwork

U Protect Wired Mat 4.0 Alu1 is a lightweight and easy to install ULTIMATE™ mineral wool wired mat. It combines all the advantages of conventional thermal and acoustic insulation with excellent fire performance and is a component of the U Protect System.

The U Protect system has been tested in accordance to EN 1366-1 and EN 1366-8 and assessed against the criteria in BS 476: Part 24. It offers up to 2 hours passive fire protection in HVAC ventilation and smoke extract ducts as well as up to 1 hour passive fire protection for kitchen ducts.

The fire resistance is also dependent on the application, thicknesses of insulation and the method of installation.

Please contact technicalsupport@saint-gobain.com for further details.

Features & Benefits



Fire Protection

The U Protect system has been tested in accordance to EN 1366-1 and EN 1366-8 and assessed against the criteria in BS 476: Part 24. It offers up to 2 hours passive fire protection in HVAC ventilation and smoke extract ducts as well as up to 1 hour passive fire protection for kitchen ducts.¹



Fire Classification

Achieves a Euroclass A1 Reaction to Fire classification, according to EN 13501-1.

¹ Fire resistance is also dependent on the application, thicknesses of insulation and method of installation. Please contact technicalsupport@saint-gobain.com for further details.



Acoustic Benefits

The inherent sound deadening properties of the ULTIMATE™ mineral wool insulation will help to reduce noise from ductwork, improving the acoustic comfort of those living or working within the building.



Thermal Performance

Offers energy savings through helping to control temperatures and reduce heat loss or gain within ductwork.



Easy to Install

The ULTIMATE™ wired mats offer a lightweight solution compared to traditional stone wool options, ensuring ease of handling and installation, as well as reducing the stress on supporting structures. Their flexibility and mechanical strength allows fast and efficient cutting and fitting. The adhesive used in the system is only required at penetration details rather than at every insulation joint.

Key Considerations

When using ISOVER U Protect Wired Mat 4.0 Alu1 you need to satisfy yourself that use of the product meets all relevant national Building Regulations and guidance as well as local, national and other applicable standards relevant for your construction or application, including requirements in relation to fire.

Please refer to the following product documents:

- Declaration of Performance - available at insulation-uk.com/products/isover-u-protect-wired-mat-4-alu1
- Safe Use Instruction Sheet - available at insulation-uk.com/healthandsafety

Product Specification

Product code	Thickness (mm)	Length (m)	Width (m)	Roll area (m ²)	Packs per pallet	Weight per m ² (kg)	Pallet area (m ²)
5200864101	30	10.00	2 x 0.60	12.00	18	2.30	216.00
5200687131	50	6.00	2 x 0.60	7.20	18	3.60	129.60
5200687132	60	5.00	2 x 0.60	6.00	18	4.30	108.00
5200680831	75	4.00	2 x 0.60	4.80	18	5.30	86.40
5200687133	80	3.70	2 x 0.60	4.44	18	5.60	79.92
5200864775	90	3.30	2 x 0.60	3.96	18	6.30	71.28
5200687134	100	3.00	2 x 0.60	3.60	18	6.90	64.80
5200680832	120	2.50	2 x 0.60	3.00	18	8.30	54.00

Thermal Conductivity

Mean temp °C	10	50	100	150	200	300	400
Declared thermal conductivity (W/m.K)	0.031	0.035	0.040	0.047	0.054	0.072	0.096

Characteristics

Application

The U Protect system has been tested in accordance to EN 1366-1 and EN 1366-8 and assessed against the criteria in BS 476: Part 24 to offer up to 2 hours passive fire protection in HVAC ventilation and smoke extraction ducts, as well as up to 1 hour passive fire protection for kitchen ducts. The system includes a range of accessories (intumescent paint, glue, screws and tape) to ensure the correct installation of the U Protect Wired Mats. For further details, please visit insulation-uk.com/hvac-insulation/duct-insulation-fire-protection or contact technicalsupport@saint-gobain.com.

Fire

Euroclass A1 Reaction to Fire classification according to EN 13501-1.

Maximum Service Temperature

400°C

Facing

U Protect Wired Mat 4.0 Alu1 is faced on one side with a black aluminium foil and reinforced with a galvanised steel grid.

Environmental

All ISOVER products are manufactured under Environmental Management System - ISO 14001.

Handling, Storage, Health and Safety

Information regarding storage, installation and handling of ISOVER products and health & safety information can be found at insulation-uk.com/healthandsafety. EUCB certified, demonstrating our mineral wool fibre products conform with Note Q of Regulation (EC) No 1272/2008.

Certification

CE Marked to EN 14303.
Designation code: MW-EN-14303-T2-ST(+)-400

Quality

Manufactured under Quality Management Standard - ISO 9001.

External Applications

U Protect Wired Mat 4.0 Alu1 is not suitable for external use.



ISOVER

White House Industrial Estate,
Runcorn, Cheshire, WA7 3DP

**Customer Service -
Order Placement and Enquiries**

Tel: 01473 820820
Email: iukcustomerservice@saint-gobain.com

Technical Support Centre

Tel: 01473 820850
Email: technicalsupport@saint-gobain.com

insulation-uk.com

Published date: Jan 2022
Document reference: 001-474

ISOVER reserves the right to amend or revise product specification without notice. The information in this publication is correct at the time of publication. The information herein should not be read in isolation as it is meant only as guidance for the user, who should always ensure that they are fully conversant with the products and systems being used and their subsequent installation prior to the commencement of work.

For an up-to-date library of product information, users should visit the website at insulation-uk.com

Saint-Gobain ISOVER UK Registered in England. Company Number 10442670.
Registered Offices: Saint-Gobain House, East Leake, Loughborough, Leicestershire, LE12 6JU.